


AQUA *safe* WATER SYSTEMS



OWNER'S MANUAL

PARTS*

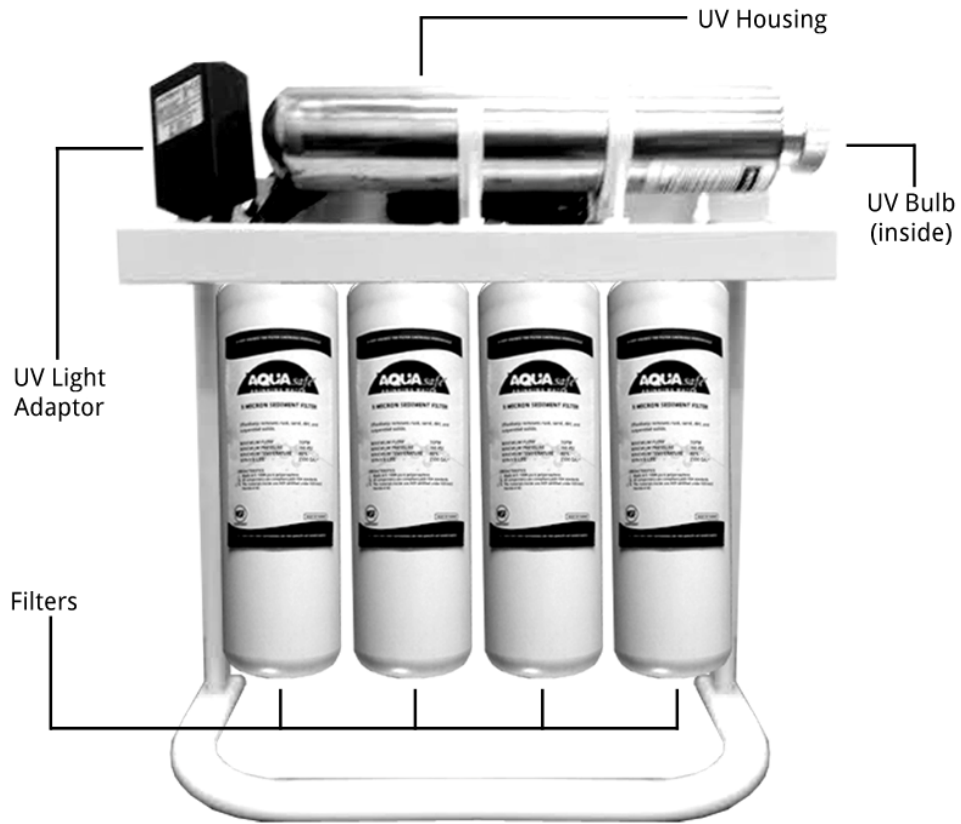

ACCESSORIES



Cap for Filter Cartridge



Hose



Bracket for UV Housing



Saddle Valve



Faucet



Pressure Gauge



UV Light

**Disclaimer:*

There may be differences in appearance between the actual product and the image shown above.



Filter Cartridge Types:

- Sediment Filter - removes rust, sand, dirt and suspended solids
- Activated Carbon - Removes chlorine, organic chemicals, taste and odor
- Carbon Block - polishes water taste
- Ion Exchange Resin - removes hard minerals such as magnesium and calcium to prevent scaling



PRODUCT SPECIFICATIONS

Item	Flow (GPM)	Height	Diameter	Max Pressure	Min. Temp	Max Temp	Service Life
Sediment Filter-1	1GPM	10"	3"	125 PSI	5°C	40°C	2500 Gal*
Activated Carbon-1	1GPM	10"	3"	125 PSI	5°C	40°C	2500 Gal*
Carbon Block-1	1GPM	10"	3"	125 PSI	5°C	40°C	2500 Gal*
Ion Exchange Resin-1	1GPM	10"	3"	125 PSI	5°C	40°C	2500 Gal*
Sediment Filter-2	2GPM	20"	3"	125 PSI	5°C	40°C	2500 Gal*
Activated Carbon-2	2GPM	20"	3"	125 PSI	5°C	40°C	2500 Gal*
Carbon Block-2	2GPM	20"	3"	125 PSI	5°C	40°C	2500 Gal*
Ion Exchange Resin-2	2GPM	20"	3"	125 PSI	5°C	40°C	2500 Gal*

**Service life of filters may vary depending on feed water quality.*

INSTALLATION

Recommended Setup:

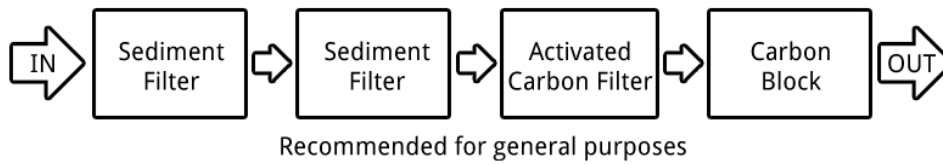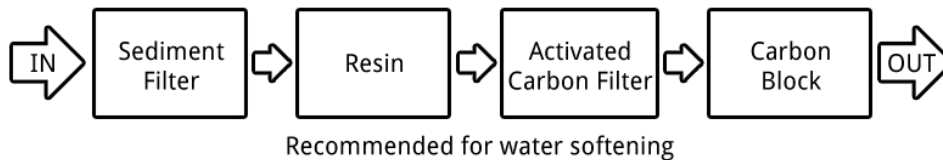

Softened water is recommended for:

- Espresso
- Iced tea
- Warewashing

Reminders:

- *AQUAsafe filters are not intended to be used with water that is microbiologically unsafe or of unknown quality without carrying out adequate disinfection before and after the filtering process.*
- *UV Light is not needed when brewing .*
- *Do not run hot water through the system*
- *Flush new filter for 15 minutes by running water through it.*




MAINTENANCE

Reminders:

- Twist clockwise to remove a filter. Twist counter-clockwise to lock a filter in place.
- Change filters when capacity is reached
- Change filters when pressure drops
- Do not use filters for more than one (1) year
- Sediment filters are replaced every 2-3 months on the average*
- Carbon filters are replaced every 3-4 months on the average*

**Based on use with local municipally-treated water. Service life may vary depending on feed water quality.*

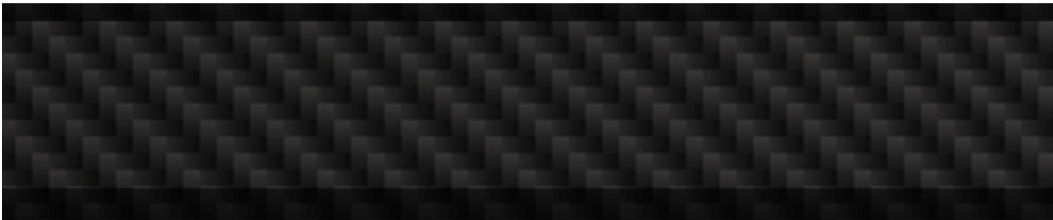

WARRANTY INFORMATION

AQUAsafe Water Treatment System warrants the hardware and all other components (excluding consumables) to be free from defects in material and workmanship for a period of one (1) year from the date of purchase by the original owner on a pro-rated basis. The warrantor will at its option and expense, either repair or replace such units subject to the following conditions, exceptions, and exclusions.

The foregoing limited warranty is subject to the following terms and conditions:

1. Warranty will be void if the unit is used with water that is not municipally treated.
2. This limited warranty shall not apply to any unit which has been repaired or altered by anyone other than the Warrantor or by a person authorized by the Warrantor, nor to any units which have been subject to misuse, neglect, or accident. Do not remove any of the products labels. Warranty will be deemed null and void if any of the original labels are removed.
3. Warrantor shall not be liable for any incidental or consequential damages.
4. This limited warranty excludes the cost of labor in removing any defective unit or installing any replacement unit. This limited warranty applies only to a unit when returned to the warrantor at the owner's expense and in accordance with the shipping instructions received from the warrantor.



#43 Scout Madrinan, Brgy. South Triangle Quezon City, Philippines 1103
Telefax: 413-0976 Mobile: 0922-835-8523/0917-795-9999